PN2907A

PNP SILICON TRANSISTOR

PNP GENERAL PURPOSE AMPLIFIER

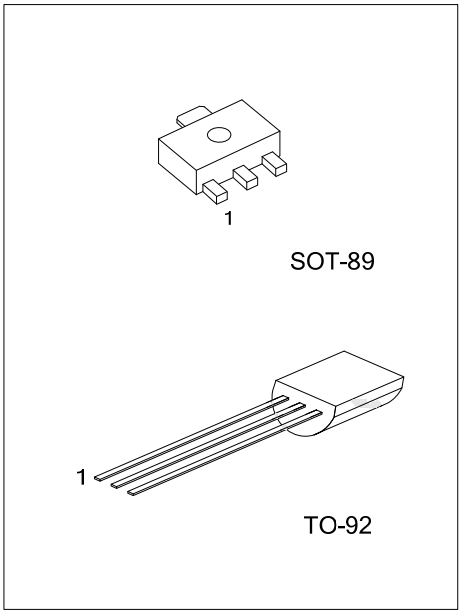

■ DESCRIPTION

This UTC **PN2907A** is designed for use as a general purpose amplifier and switch requiring collector currents to 600 mA.

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free Plating	Halogen Free		1	2	3	
PN2907AL-AB3-R	PN2907AG-AB3-R	SOT-89	B	C	E	Tape Reel
PN2907AL-T92-B	PN2907AG-T92-B	TO-92	E	B	C	Tape Box
PN2907AL-T92-K	PN2907AG-T92-K	TO-92	E	B	C	Bulk

Note: Pin Assignment: E: Emitter C: Collector B: Base

PN2907AL-AB3-R (1)Packing Type (2)Package Type (3)Lead Free	(1) B: Tape Box, K: Bulk, R: Tape Reel (2) AB3: SOT-89, T92: TO-92 (3) L: Lead Free, G: Halogen Free

■ MARKING

SOT-89	TO-92
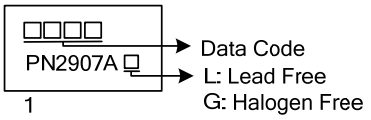	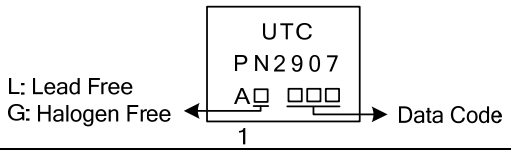

Copyright © 2014 Unisonic Technologies Co., Ltd

■ ABSOLUTE MAXIUM RATINGS (T_A=25°C, unless otherwise specified.)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Emitter Voltage		V_{CEO}	-60	V
Collector-Base Voltage		V_{CBO}	-60	V
Emitter-Base Voltage		V_{EBO}	-5	V
Collector Current-Continuous		I_C	-600	mA
Power Dissipation	SOT-89	P_D	350	mW
	TO-92		625	mW
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-40 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Thermal resistance, junction to Ambient	SOT-89	θ_{JA}	104	℃/W
	TO-92		200	℃/W

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage	BV_{CEO}	I_C=-10mA, I_B=0	-60			V
Collector-Base Breakdown Voltage	BV_{CBO}	I_C=-10μA, I_E=0	-60			V
Emitter-Base Breakdown Voltage	BV_{EBO}	I_E=-10μA , I_C=0	-5			V
Base Cutoff Current	I_B	V_{CB}=-30V, V_{EB}=-0.5V			-50	nA
Collector Cutoff Current	I_{CEX}	V_{CE}=-30V, V_{BE}=-0.5V			-50	nA
Collector Cutoff Current	I_{CBO}	V_{CB}=-50V, I_E=0 V_{CB}=-50V, I_E=0, Ta=150°C			-0.02 -20	μA μA
ON CHARACTERISTICS						
DC Current Gain	h_{FE}	I_C=-0.1mA, V_{CE}=-10V	75			
		I_C=-1.0 mA, V_{CE}=-10V	100			
		I_C=-10 mA, V_{CE}=-10V	100			
		I_C=-150 mA, V_{CE}=-10V (Note)	100		300	
		I_C=-500 mA, V_{CE}=-10V (Note)	50			
Collector-Emitter Saturation Voltage (Note)	$V_{CE(SAT)}$	I_C=-150mA, I_B=-15mA I_C=-500mA, I_B=-50mA			-0.4 -1.6	V V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	I_C=-150mA, I_B=-15mA (Note) I_C=-500mA, I_B=-50mA			-1.3 -2.6	V V
SMALL SIGNAL CHARACTERISTICS						
Current Gain – Bandwidth Product	f_T	I_C=-50mA, V_{CE}=-20V, f=100MHz	200			MHz
Output Capacitance	C_{ob}	V_{CB}=-10V, I_E=0, f=100kHz			8	pF
Input Capacitance	C_{ib}	V_{EB}=-2V, I_C=0, f=100kHz			30	pF
SWITCHING CHARACTERISTICS						
Turn-on Time	t_{ON}	V_{CC}=-30V, I_C=-150mA I_{B1}=-15mA			45	ns
Delay Time	t_{DLY}				10	ns
Rise Time	t_R				40	ns
Turn-off Time	t_{OFF}	V_{CC}=-6V, I_C=-150mA I_{B1}=I_{B2}=-15mA			100	ns
Storage Time	t_S				80	ns
Fall Time	t_F				30	ns

Note: Pulse Test: Pulse Width ≤ 300ms, Duty Cycle≤2.0%

■ TEST CIRCUITS

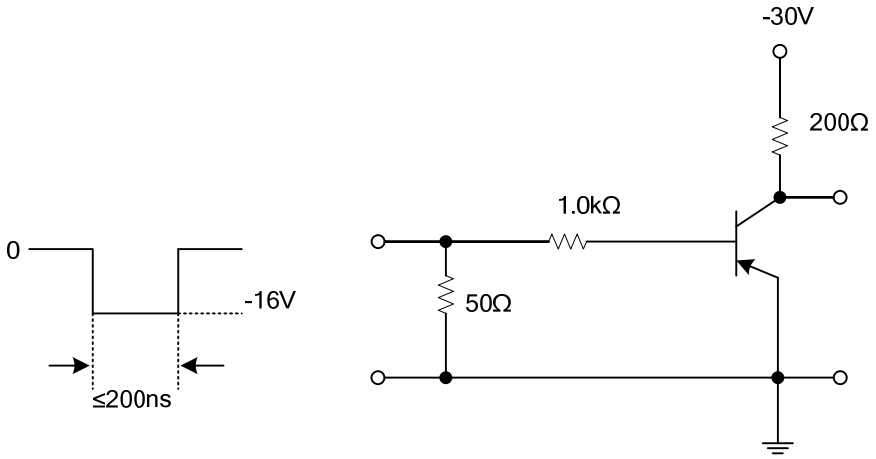

Fig. 1 Saturated Turn-On Switching Time Test Circuit

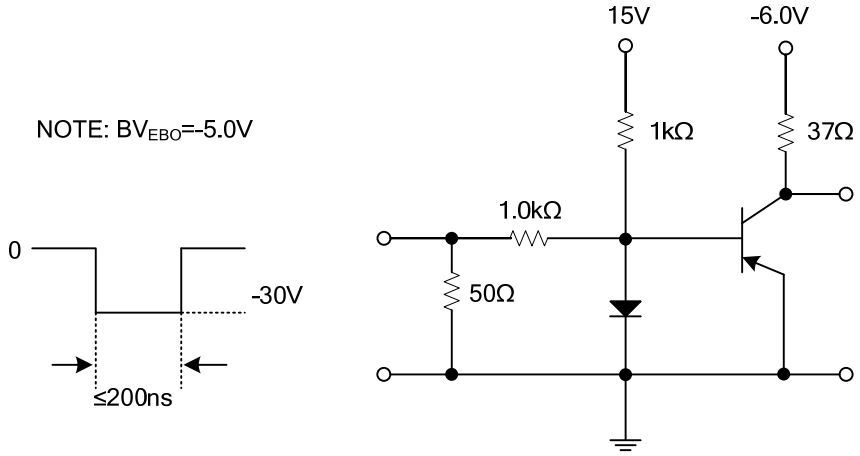

Fig. 2 Saturated Turn-Off Switching Time Test Circuit

■ TYPICAL CHARACTERISTICS

Typical Pulsed Current Gain vs. Collector Current

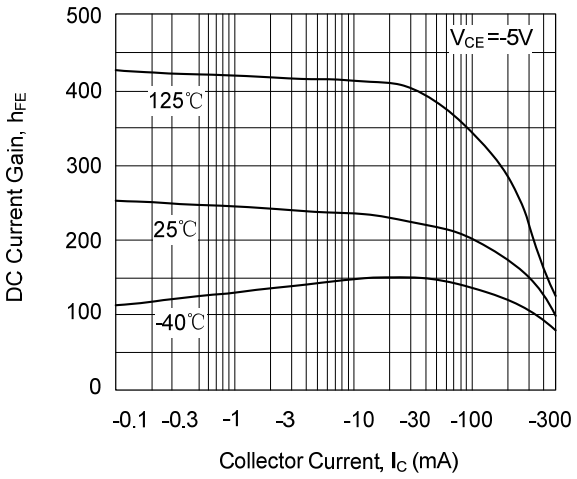

Collector-Emitter Saturation Voltage vs. Collector Current

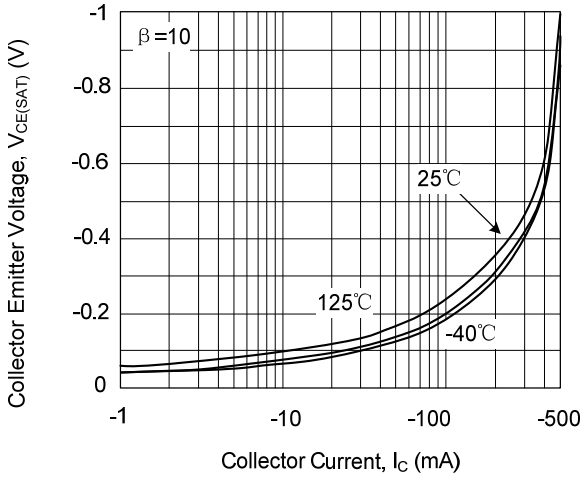

Base-Emitter Saturation Voltage vs. Collector Current

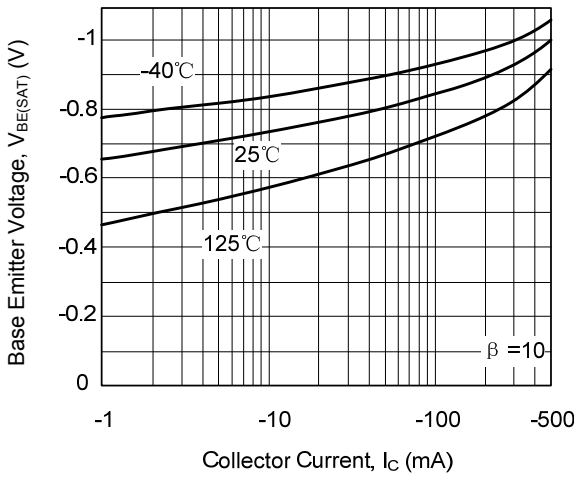

Base Emitter ON Voltage vs. Collector Current

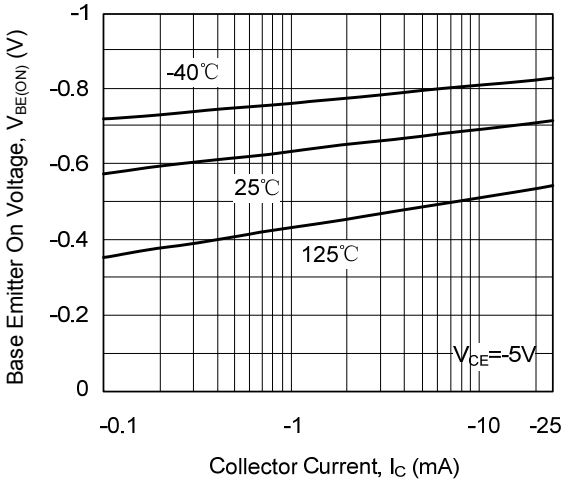

Collector-Cutoff Current vs. Ambient Temperature

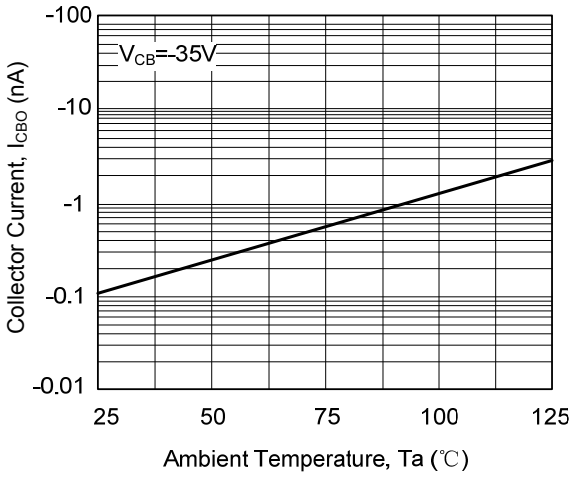

Input and Output Capacitance vs. Reverse Bias Voltage

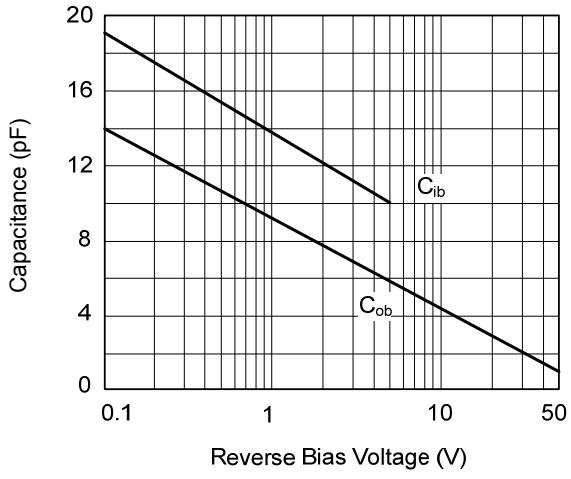

■ TYPICAL CHARACTERISTICS(Cont.)

Switching Times vs. Collector Current

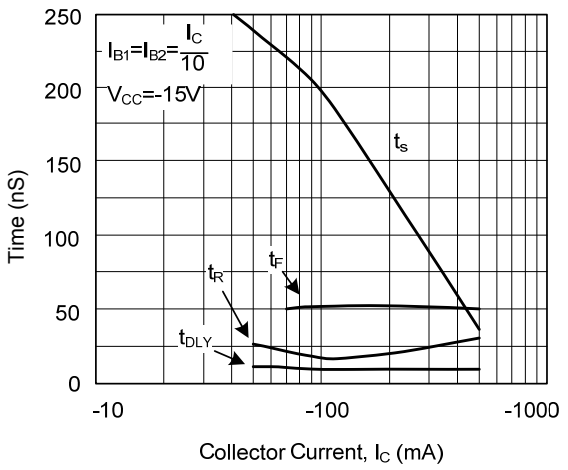

Turn On and Turn Off Times vs. Collector Current

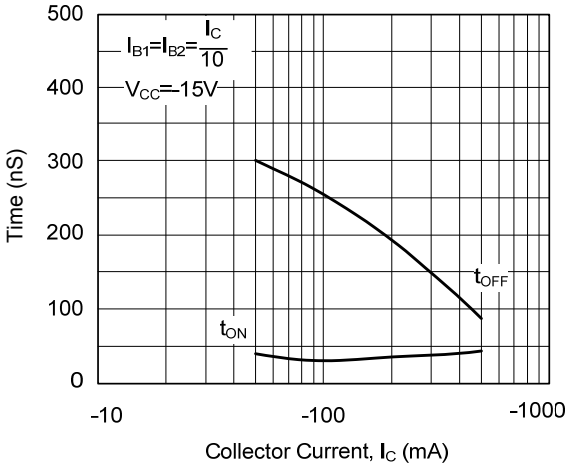

Rise Time vs Collector and Turn On Base Currents

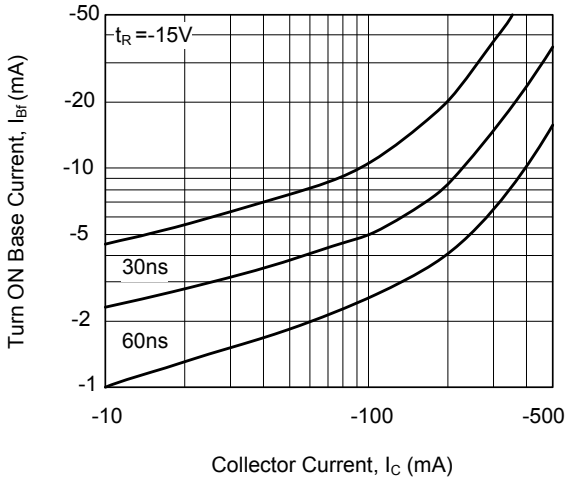

■ TYPICAL CHARACTERISTICS FOR COMMON EMITTER (f=1kHz)

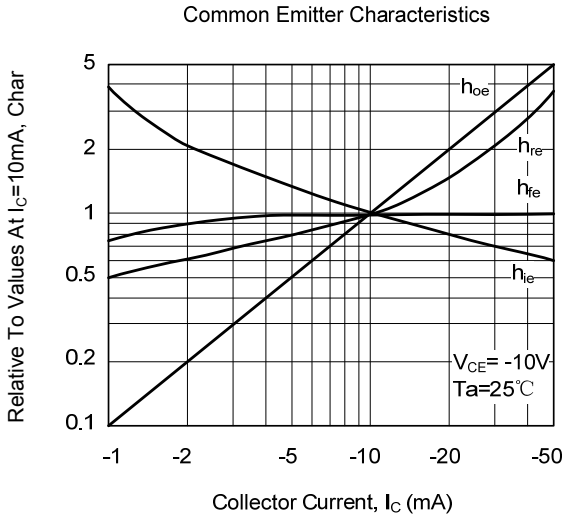

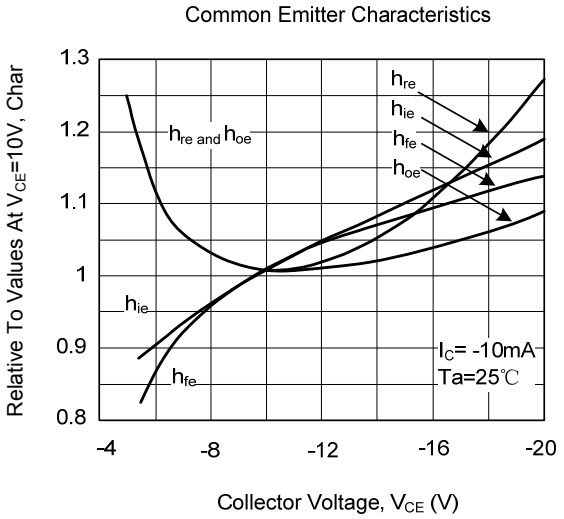

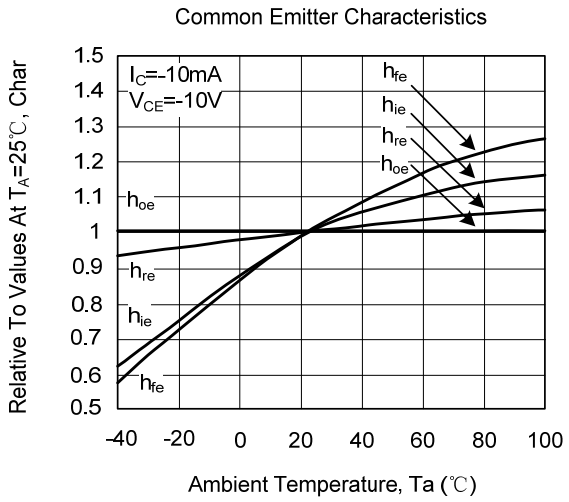

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.